GBP

GARAGE GUARDIAN™ — INDUCTION

Garage Luminaire with Uplight Band, Low Bay, Enclosed

APPLICATIONS

- Parking garages, warehouses, entranceways, stairways and service stations

SPECIFICATION FEATURES

- Attractive sleek styling with low profile (overall height of 12" (less mounting hardware)
- Standard Symmetric Type V medium distribution optimized for parking garage design.
- Uplight window for uplight contribution and elimination of dark ceiling "cave effect"
- Cut-off downward throw for minimal driver glare and pedestrian safety
- Optional field adjustable internal uplight shielding for reduction of unwanted spill light available in multi-directional configurations
- Rugged die-cast aluminum housing
- Painted matching housing and lower refractor band
- UV stabilized high temperature acrylic or optional impact resistant polycarbonate optic and lens
- Sealed and gasketed lens and refractor
- Lens attachment screws positioned outboard of lens gasketing for reliable lens & optical housing seal
- Lens closure system designed to prevent over-tightening and lens damage
- Multiple mounting options including: surface mount; pendant; flex pendant; primary electrical disconnect (GELS MPM versions). Optional attractive bird shroud with adjustable pendant mounting.
- Available in Induction (85 watt max)
- Lamp included
- Tamper proof screws provided

ORDERING NUMBER LOGIC — INDUCTION

GBP PRODUCT IDENT	G HOUSING & BAND COLOR	08 WATTAGE	Q LIGHT SOURCE	1 VOLTAGE	F BALLAST TYPE	AM OPTICAL	VA PHOTO CODE	10 MOUNTING CODE	F OPTIONS
XXX	X	XX	X	X	X	XX	XX	XX	X
GBP = Garage Guardian With Painted Lower Refractor Band	G = Metallic Gray W = White Note: GBP color includes both housing and lower band	08 = 85 Watt	Q = QL Induction Lamp/ Ballast	1 = 120 G = 208-277 volt	E = Electronic	AM = Medium Symmetric Pattern With Uplight - Acrylic PM = Medium Symmetric Pattern With Uplight - Impact Resistant Polycarbonate AD = Medium Symmetric Pattern With No Uplight - Acrylic PD = Medium SYmmetric Pattern With No Uplight - Impact Resistant Polycarbonate	VA = Standard Distribution SA = Shield/Single House Side SC = Internal Uplight Shield / Two Sides Opposing SS = No Uplight, Solid 360° Shield	10 = Surface Mtg. (Junction-box not included) 11 = 3/4" Rigid Pendant 13 = 3/4"Flex Pendant - Adjustable 01 = Primary Electrical Disconnect With MPM-C 02 = Primary Electrical Disconnect With MPM-3PR 03 = Primary Electrical Disconnect With MPM-3PF 04 = Primary Electrical Disconnect With MPM-3PRFW 05 = Primary Electrical Disconnect With MPM-3PRTFW 06 = Primary Electrical Disconnect With MPM-WW	F = Fusing

MAX AMBIENT RATING			
Lamp Type	Ceiling Mtg	Pend Mtg	Uplight Shield
QL	35C	40C	N/A

PHOTOMETRIC SELECTION TABLE

Garage Guardian - Induction					
Wattage	Light Source	Uplight	Optical	Photometric Curve	Optical Code
85W	Induction	Uplight	Medium	453405	AD or PD
85W	Induction	No Uplight	Medium	453406	AM or PM

Ambient rating - contact factory

GARAGE GUARDIAN™ — INDUCTION

Garage Luminaire with Uplight Band, Low Bay, Enclosed

FIXTURE DIMENSIONS

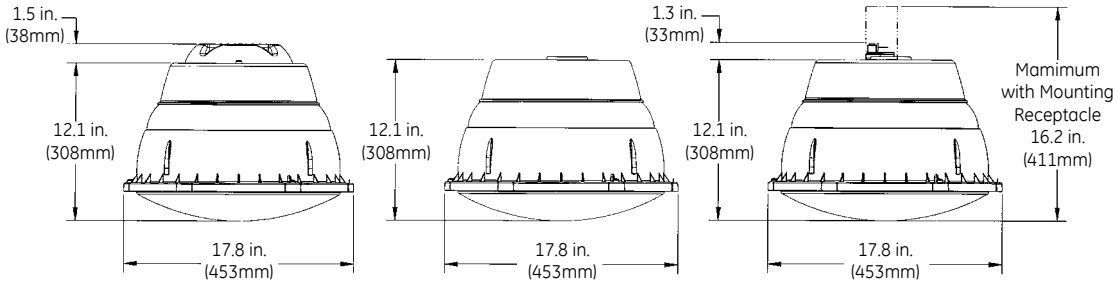

Flexible Pendant Mounting | **Pendant Mounting** | **Sliding Disconnect Mounting**

DATA

Approximate Net Weight	**lbs**	**kgs**
Ballast and Optical	**10-17**	**5-8**

Surface Mounting to J-box

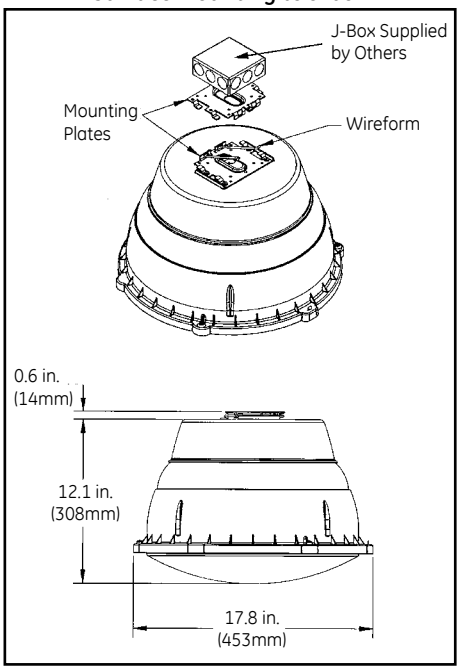

INDUCTION LAMP/BALLAST SYSTEM FEATURES:

- 80+CRI
- Lamp/ballast system life is rated 100,00 hours (vs 24,000 for HPS)
- Instant On and Instant Restrike
- 4000K Color Temperature
- 5 year warranty
- Minimum Start -30° F

REFERENCES

See Page I-104 for start of Accessories.
See Page I-110 - I-111 for MPM (Multi-purpose Mounting) information.
See Pages I-129 for Explanation of Options and Other Terms Used.